




SECTION THRU STAIR SHAFT WALL

Scale: 0 2 4 8 inches

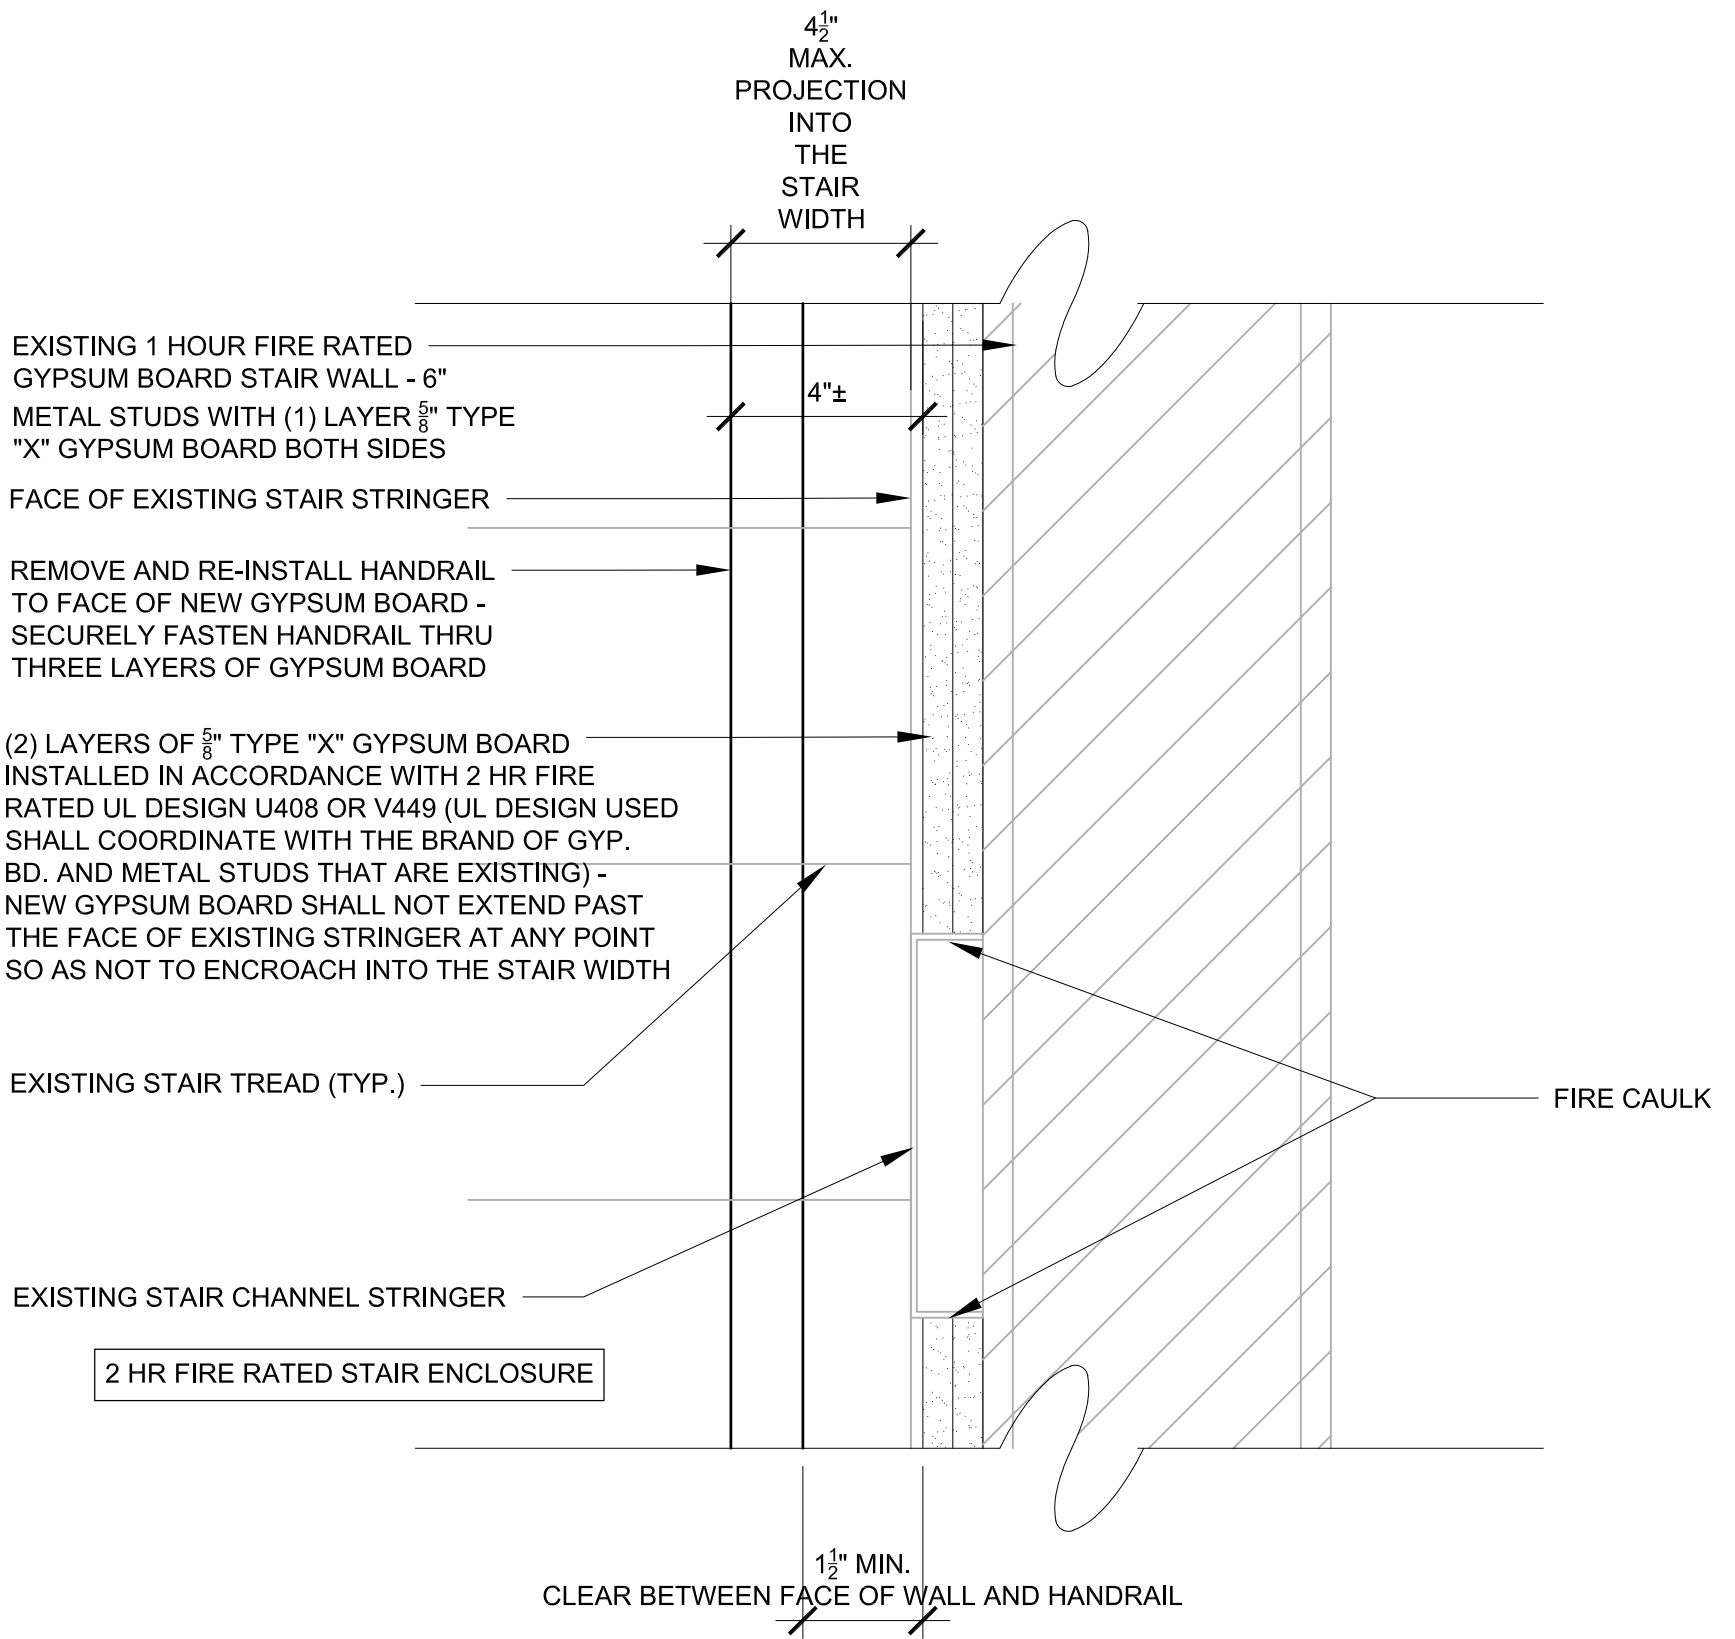

SECTION THRU STAIR WALL

Scale: 0 2 4 8 inches

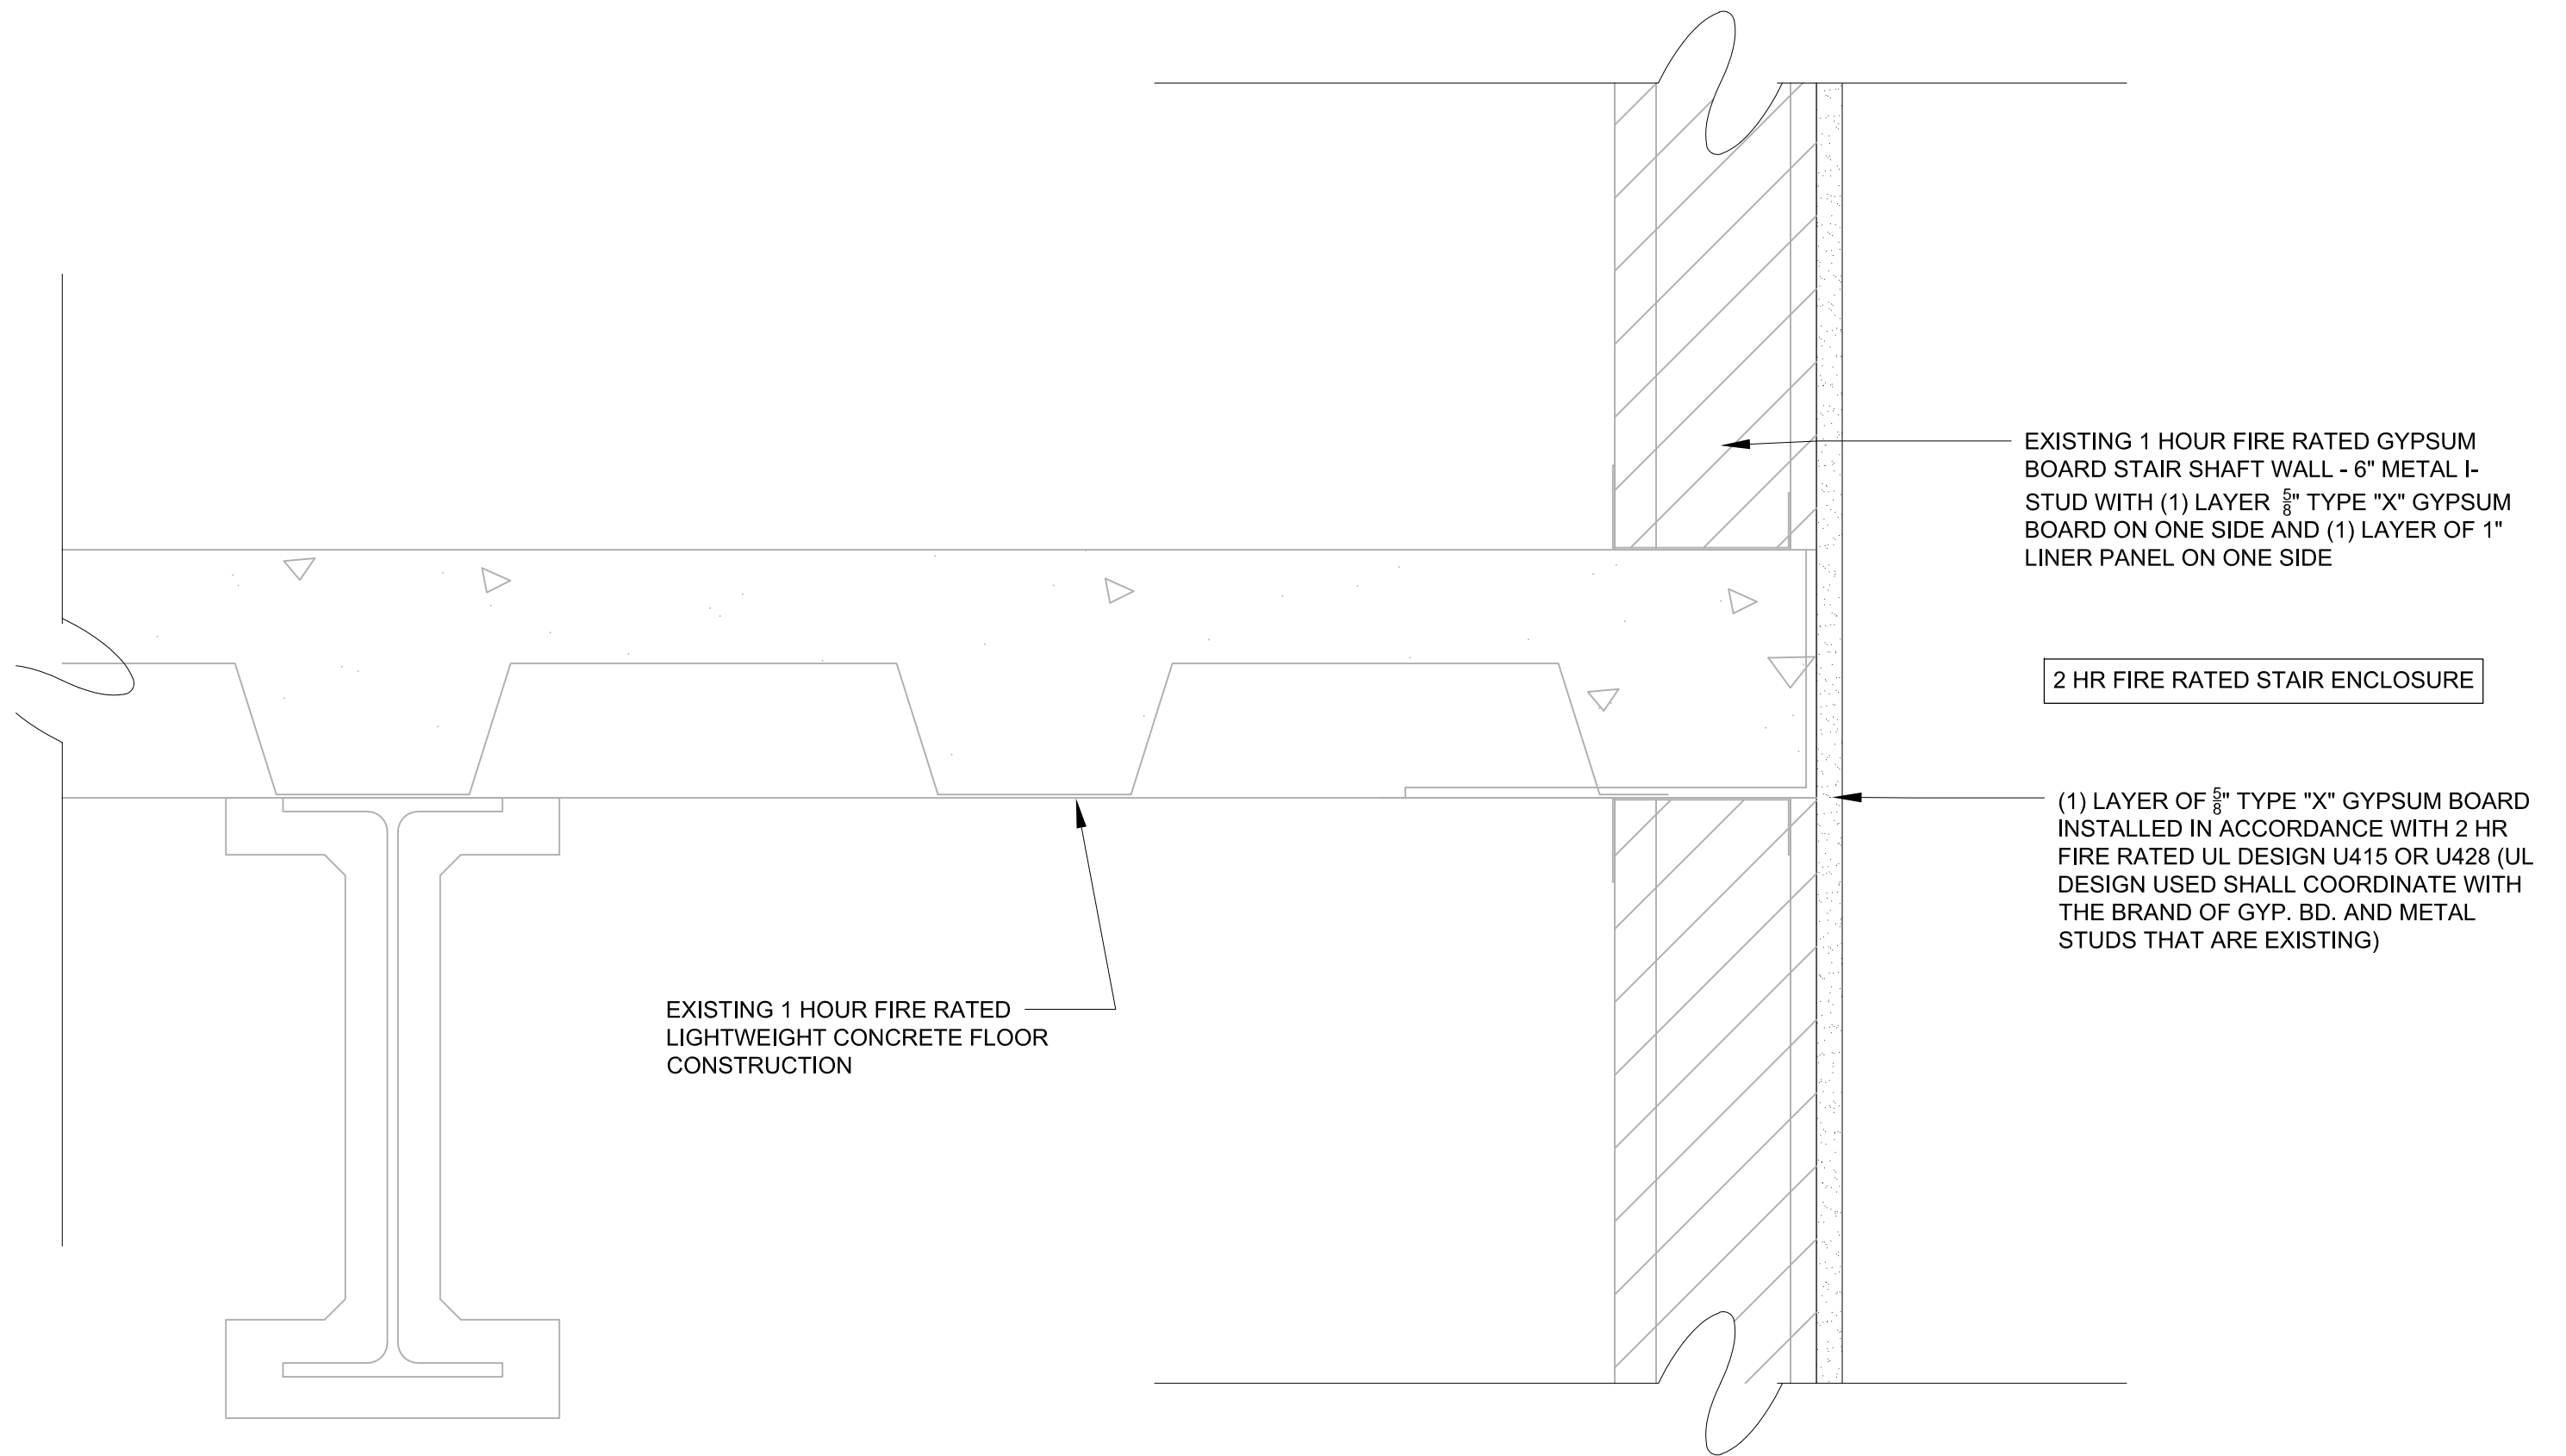


EXISTING 1 HOUR FIRE RATED GYPSUM BOARD STAIR SHAFT WALL - 6" METAL I-STUD WITH (1) LAYER $\frac{5}{8}$ " TYPE "X" GYPSUM BOARD ON ONE SIDE AND (1) LAYER OF 1" LINER PANEL ON ONE SIDE

2 HR FIRE RATED STAIR ENCLOSURE


(1) LAYER OF $\frac{5}{8}$ " TYPE "X" GYPSUM BOARD INSTALLED IN ACCORDANCE WITH 2 HR FIRE RATED UL DESIGN U415 OR U428 (UL DESIGN USED SHALL COORDINATE WITH THE BRAND OF GYP. BD. AND METAL STUDS THAT ARE EXISTING)

EXISTING 1 HOUR FIRE RATED LIGHTWEIGHT CONCRETE FLOOR CONSTRUCTION



SECTION THRU STAIR SHAFT WALL AT FLOOR SLAB

Scale: 0 2 4 8 inches

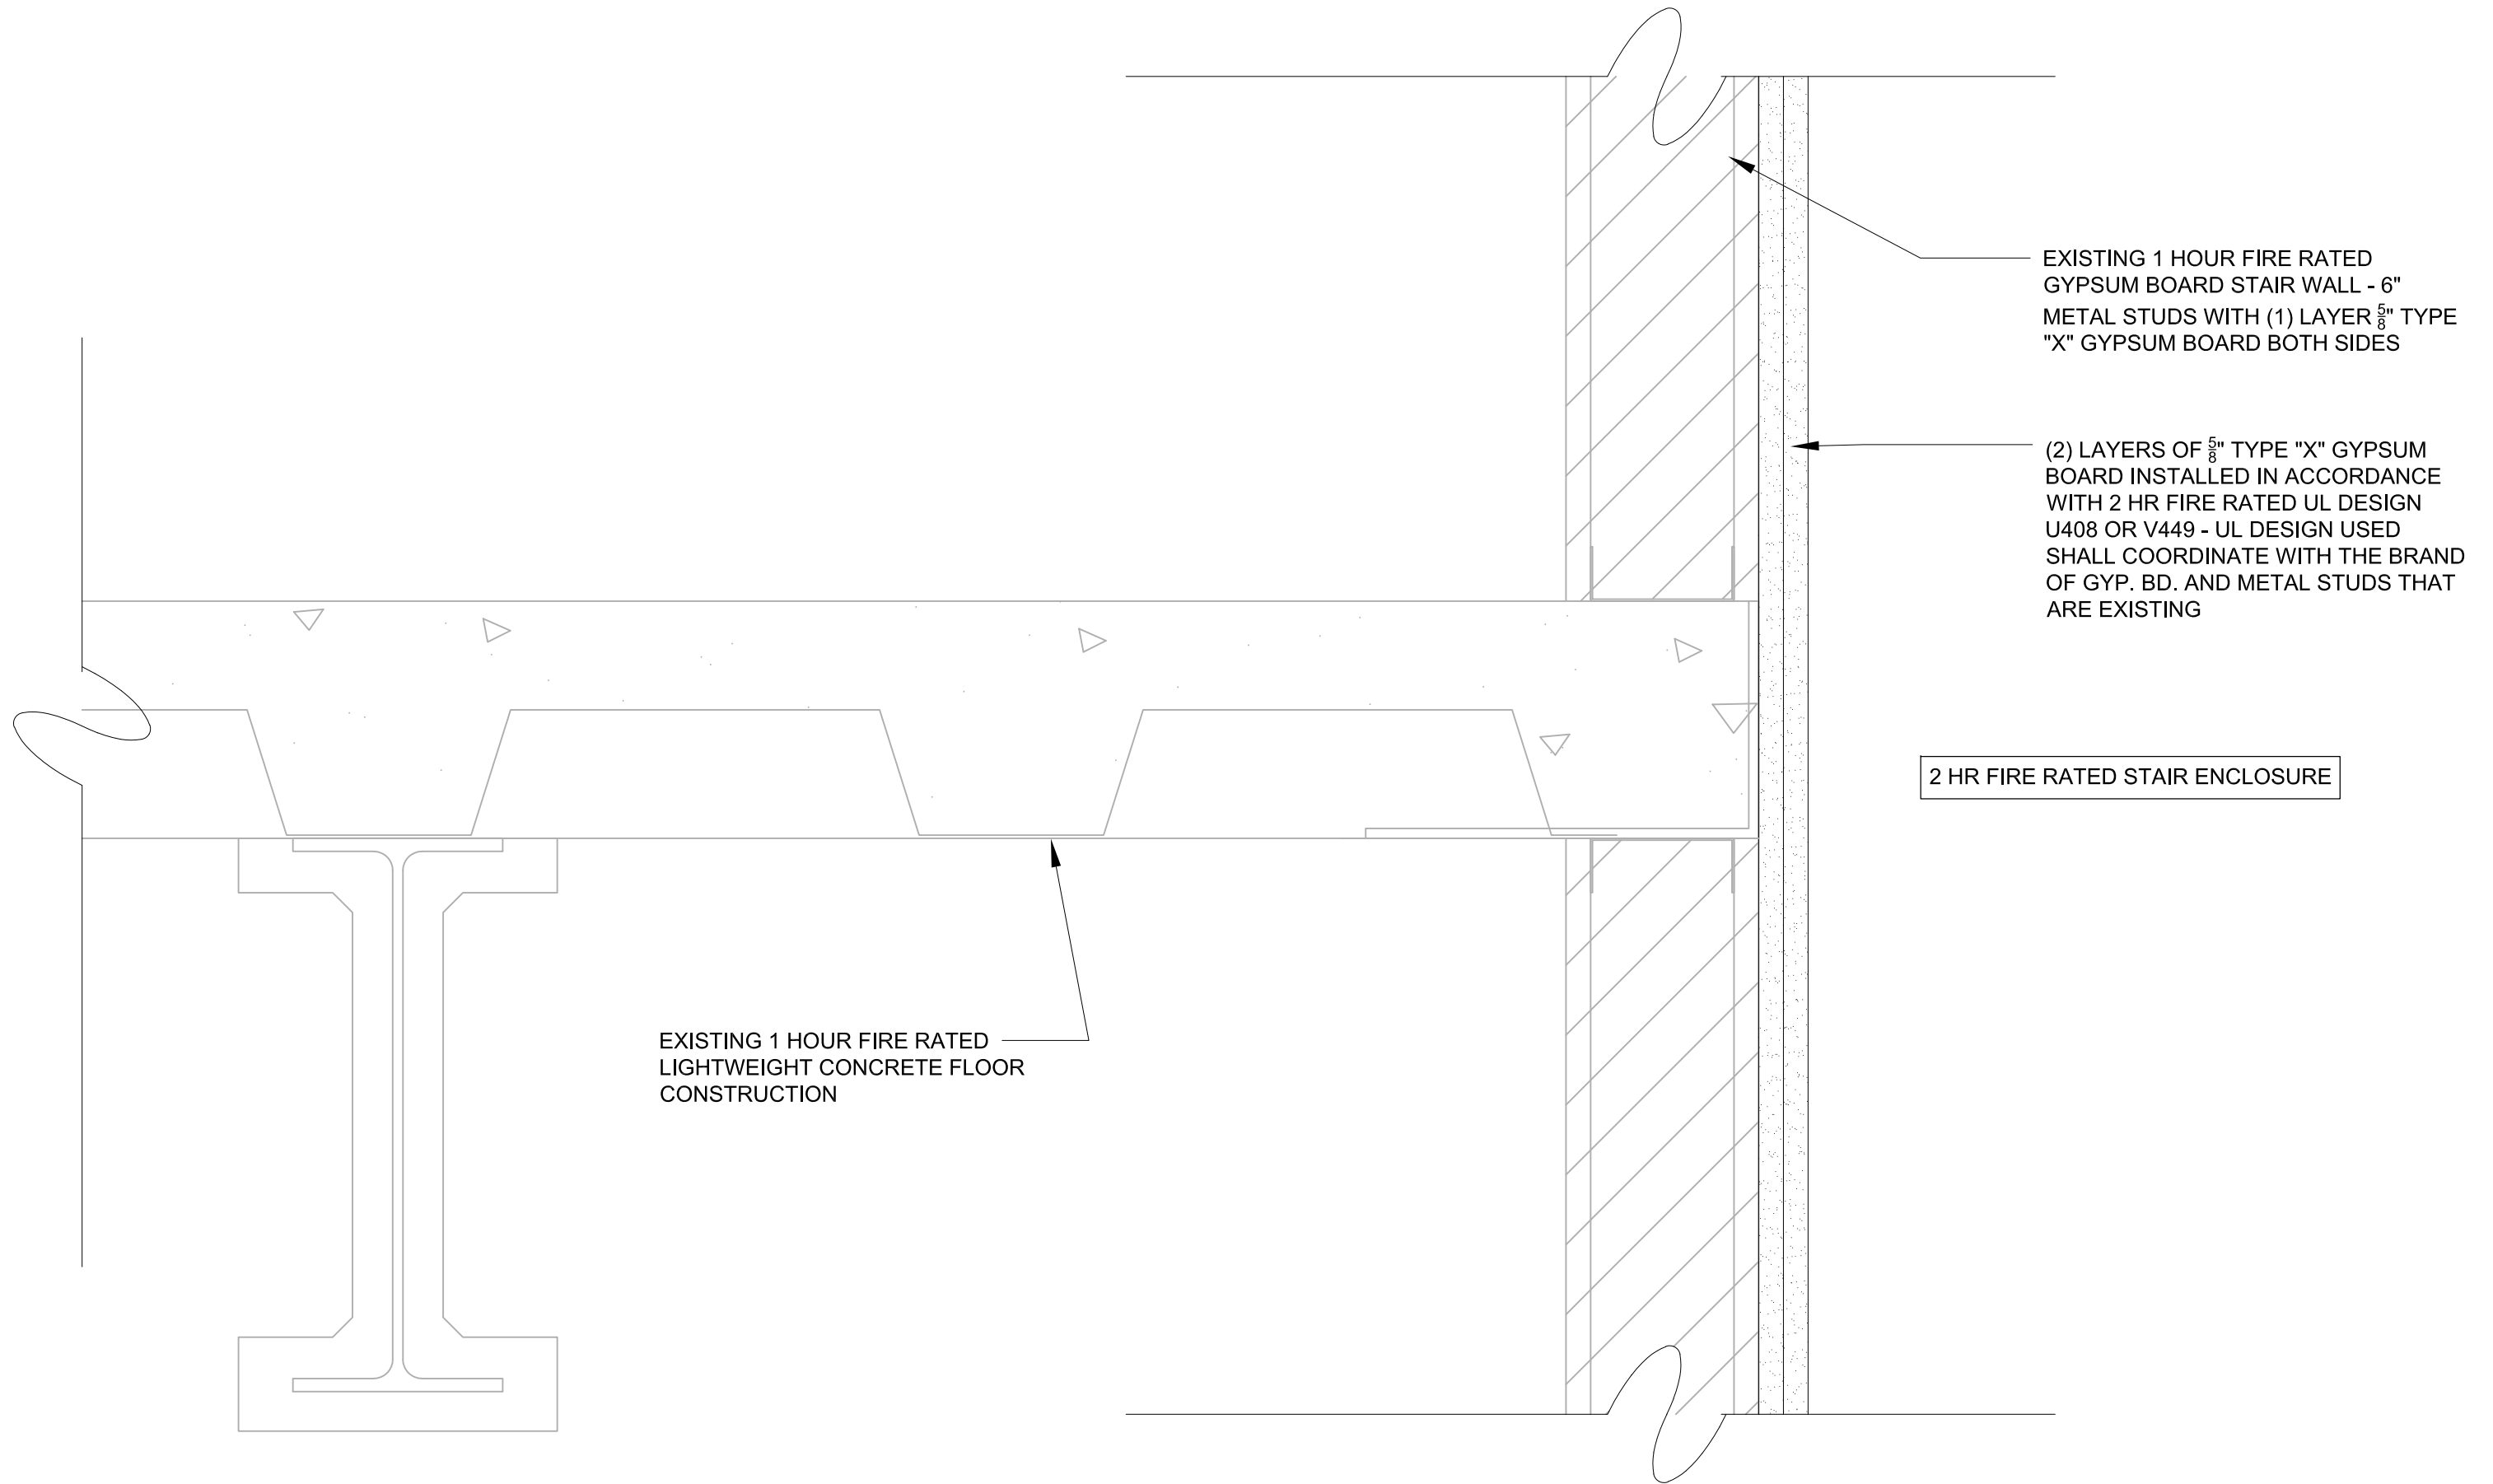

EXISTING 1 HOUR FIRE RATED
GYPSUM BOARD STAIR WALL - 6"
METAL STUDS WITH (1) LAYER $\frac{5}{8}$ " TYPE
"X" GYPSUM BOARD BOTH SIDES

(2) LAYERS OF $\frac{5}{8}$ " TYPE "X" GYPSUM
BOARD INSTALLED IN ACCORDANCE
WITH 2 HR FIRE RATED UL DESIGN
U408 OR V449 - UL DESIGN USED
SHALL COORDINATE WITH THE BRAND
OF GYP. BD. AND METAL STUDS THAT
ARE EXISTING

2 HR FIRE RATED STAIR ENCLOSURE

EXISTING 1 HOUR FIRE RATED
LIGHTWEIGHT CONCRETE FLOOR
CONSTRUCTION

D 4
-

SECTION THRU STAIR WALL AT FLOOR SLAB

Scale: 0 2 4 8 inches